



# SALCHAIN

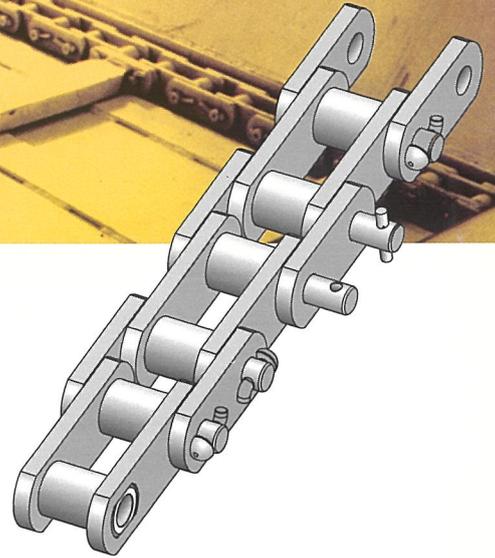

## FEEDER-BREAKER CHAIN (3"- 4") DOUBLE PITCH

The Salchain double pitch conveyor chain is primarily used for coal feeder-breaker machines. These chains are made from specially designed alloy steel and offer the best possible combination of high strength, wear resistance and a long, trouble-free service life - even under the most arduous operating conditions. Salchain's feeder-breaker chain frequently conveys over 2 million tons of coal over its life span.

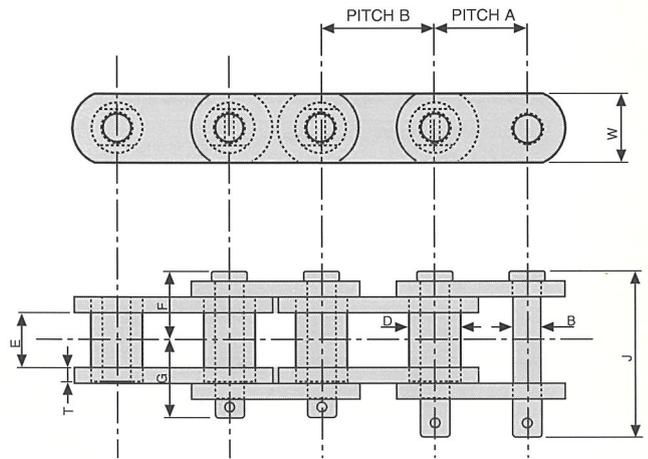

Typical minimum breaking load for **standard** chains (single strand) = 52 Tonnes  
**Heavy duty** chains available with increased breaking loads as per customer requirement.

Chain No.	PITCH		SIDEBAR			STD. PIN			EXT. PIN			BUSH		
	A	B	W	T	MATL.	G	F	MATL.	B	J	MATL.	D	E	MATL.
101501	76.2	101.6	60	14	CT	71.6	61.9	AL	24.7	150.5	AL	45	50.8	CC

Materials: **CT** = Carbon Steel Through Hardened **CC** = Carbon Steel Case Hardened **AL** = Alloy Steel Through Hardened + Induction Hardened  
 Additional information available on request.



Rinkhals Street, Industries East, Germiston, 1401, Gauteng, South Africa  
 P.O.Box 366 Germiston 1400 South Africa. Telephone (011) 873 6666  
 International +2711 873 6666 Fax: + 2711 873 1825